



AWPD8-1-4GA

Your RF & Microwave Components Source

Features:

- Broad Operating Bandwidth
- Small Size
- Cost Efficient


Specifications

Parameters	Min.	Тур.	Max.	Units
Frequency Range	1		4	GHz
Insertion Loss			1.5	dB
Isolation	20			dB
VSWR Input			1.5:1	
VSWR Output			1.25:1	
Phase Balance			± 4	deg
Amplitude Balance			\pm 0.4	dB
Forward Power			30	W
Reverse Power			2	W
Operating Temperature Range	-55		+85	°C
Impedance		50		Ω
Connectors	SMA-Female			
Finish	Dark Navy Blue Paint			
Finish	Dark Navy Blue Paint			

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Amway reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

www.amwav.com Email: sales@amwav.com Tel/Fax: +86 02887492975

Outline Drawing:

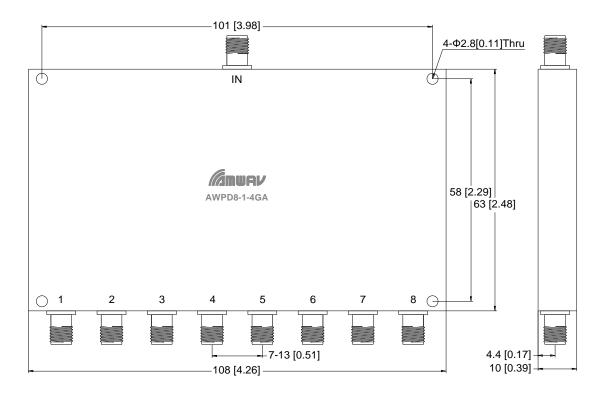

1. Dimensions are in mm [Inches]

2. Tolerances: Outline drawing: ±0.2 [0.008]

Hole: ±0.2 [0.008]



Website: www.amwav.com E-mail: sales@amwav.com Tel: +86 02887492975

Part No.

AWPD8-1-4GA

Note:

All SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

Scale	DWG No.	REV		
1:1		Α		